


TECHNICAL DATA SHEET

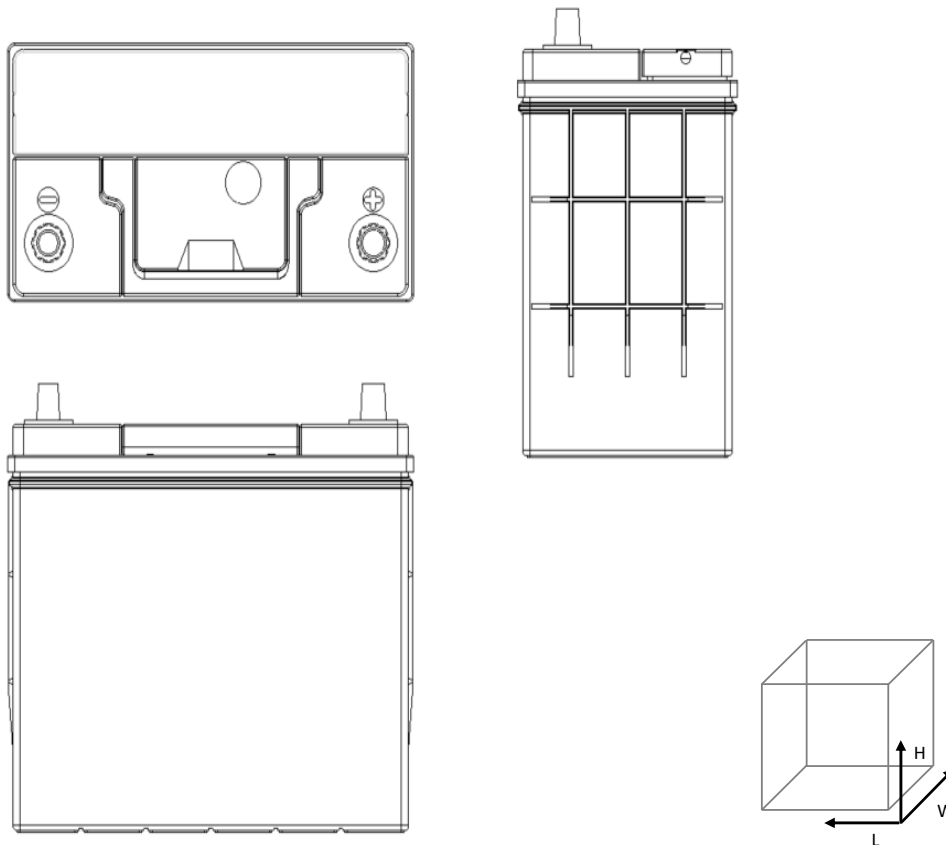

| PERFORMANCE | | | CONTAINER | | |
|---------------------------|---------|----|---|----------------------|-------|
| VOLTAGE: | 12 | V | Group: | B24 | Black |
| C20: | 45 | Ah | Hold Down: | B0 | |
| CCA: | 360 | EN | Please refer to the catalog or our website for the details of hold down types of the battery container. | | |
| Vibration: | V3 | | COVER | | |
| Endurance: | - | | Type: | Heat sealed | Black |
| Water consumption: | W4 | | Polarity: | L | |
| Technology: | Flooded | | Terminals: | Small | |
| Grid alloy: | Ca/Ca | | Filter: | 2 Filters both sides | |
| WEIGHT AND STD. DIMENSION | | | HANDLES | | |
| Battery weight: | 11,5 | kg | Handles: | 1 handle | |
| Volume acid: | 2,9 | l | REMARK | | |
| Length: | 234 | mm | | | |
| Width: | 127 | mm | | | |
| Height: | 220 | mm | | | |
| Total Height: | 220 | mm | | | |